


nauled

Once upon a light

ELEVATOR LED LIGHT SOLUTIONS

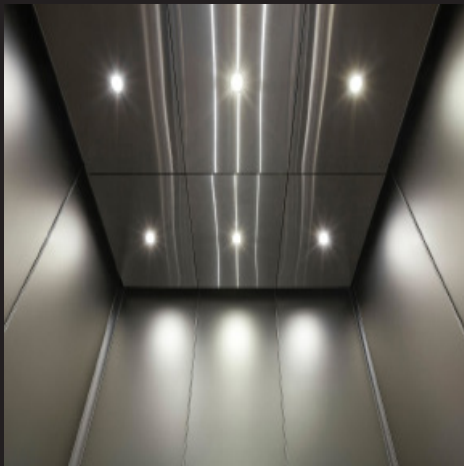


OUR
NEW PRODUCTS

NEW

LED SPOTLIGHT ANTI-VANDALO N12XX5385IAV

MADE IN ITALY

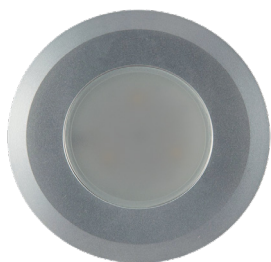

DESCRIPTION


- Recessed 12 LED spotlight
- CAT. 2 Certified
- Impossible to steal it and to tamper with it
- Flame-resistant
- 5 mm thick tempered glass
- Reduced height, thickness only 23 mm
- Single body in anodized aluminum
- **Current 350 mA and Power 2,87 W**
- High luminous efficiency 120 Lm/W
- Kit: wiring + power supply + estensions
- Can be combined with LED Emergency Kit

Cod.	Body and Hole	Flux	Color Temp.
5385I-AV	85 x 55 Ø mm	327- 337 lm	3000°-4000° K


NEW

LED SPOTLIGHT BUS DE LUS

MADE IN ITALY

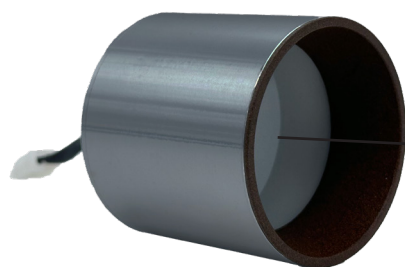

New LED Technology



DESCRIPTION

- Recessed LED spotlight with self-locking screw fixing
- METALCORE Printed Circuit with 12 CREE brand LEDs
- reduced overall height, only 56 mm
- 7 finishes available: white, black, titanium, bronze, brass, metal-bun, burnished
- Color temperatures available: 3000°/4000° K
- Single body in anodized aluminum
- Kit: wiring + power supply + estensions
- Can be combined with LED Emergency Kit

Cod.	Flux	Color Temp.	Power	Body and Hole
BDL1230-X	507 lm	3000° K	2,87 W	57 x 55 Ø mm
BDL1240-X	565 lm	4000° K	2,87 W	57 x 55 Ø mm

NEW

LED BAR N1814-NP028

MADE IN ITALY



DESCRIPTION

- Led bar 18 middle Power Led SMD2835
- Current 350 mA
- Length 14 cm
- Optimized for the replacement of neon tubes 14 W

KIT COMPOSED OF:

- Aluminium led profile NP028 with caps and cover
- Power supply AL20MCH
- Extension
- Wiring

Cod.	Flux	Color Temp.	Power	Single Led Current
N1814	540 lm	4000° K	2,84 W	58 mA

NEW

LED BULB

NMR16 12-24V AC/DC

MADE IN ITALY



DESCRIPTION

- GU5.3 socket
- Voltage 12-24V AC/DC
- Ideal for replacing halogen spot 35 W
- IP rate: IP20
- Not dimmable

Mod.	Flux	Power	Color Temp.
NMR16-NW-12-24	345 lm	4,5 W	4000° K

NEW

REGLETTE LED

NPHT5



DESCRIPTION


- G13 socket
- Voltage 220-240V
- Frequency 50 o 60 Hz
- CRI >80
- Isolation class II
- IP rate: IP20
- Polycarbonate body

Mod.	Flux	Length	Power
NPHT5305840	540 lm	300 mm	5 W
NPHT56010840	1050 lm	600 mm	10 W
NPHT59015840	1600 lm	900 mm	15 W
NPHT512020840	2100 lm	1200 mm	20 W
NPHT515024840	2600 lm	1500 mm	24 W

NEW

LED TUBES

TLPHXEF

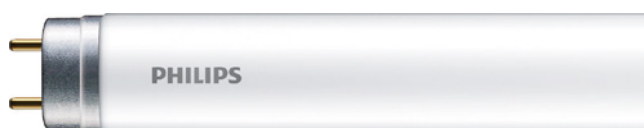

DESCRIZIONE

- Attacco G13
- Tensione 220-240V
- Temperatura colore 4000° K
- CRI 80
- Durata nominale 20.000 h

Mod.	Length	Flux	Power
TLPH600EF	602,5 mm	800 lm	8 W
TLPH1200EF	1212 mm	1600 lm	16 W
TLPH1500EF	1513 mm	2000 lm	19,5 W

NEW

LINEAR LED MACHINE PANEL LIGHT




DESCRIPTION

- Small footprint for easy maintenance.
- Practical and easy to handle
- 3 magnets located on the back
- Equipped with touch on/off switch with blue backlight
- Color temperatures available: 4000° K
- Combinable with Led Emergency Kit.
- Power cable length 150 cm

Mod.	Size	Voltage	Power
LQM	350 x 17,3 x 7 mm	24 VDC	5 W

NEW

EMERGENCY KIT EML6061

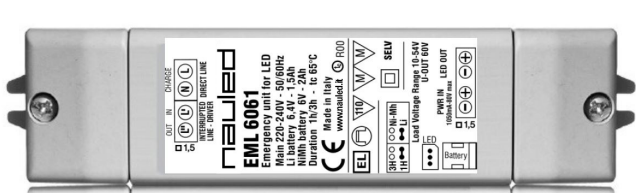

DESCRIPTION

- Emergency-only operation
- Continuous light operation with electronic drivers
- Battery LiFePO4 (6,4V 1,5Ah)
- 1 or 3 hours duration
- Connected to power supplies with 80V maximum output voltage, 1050mA maximum output current

Mod.	Voltage	Current	Recharging time
EML6061	220-240V	20 mA	12 h

Find out more about
OUR PRODUCTS



www.nauled.it



Via Cavour, 13/A - 22040 Lurago D'Erba (CO) | P.IVA 03217960131
T: +39 031 4130026 | E: info@nauled.it